

LCD Smart Interactive Board



HUIYUE LCD Smart Interactive Board is wide application in the conference office and becoming a strong assistant of teachers. It can replace a series of equipment widely existing in conference rooms and classroom, such as projectors, computers, television and so on.

The intelligent experience, high-definition display, smooth touch, teleconference and other rich functions have updated the traditional meeting and class methods, and also solved various inefficiencies and inconveniences in the meetings over the years.

Main Features



4K Super Clear Display

Full 3840*2160 high definition images can be displayed




Muti-touch Operation

20-point touch allows several people to write at the same time



Robust Dual System

Android and Windows dual system supports more applications

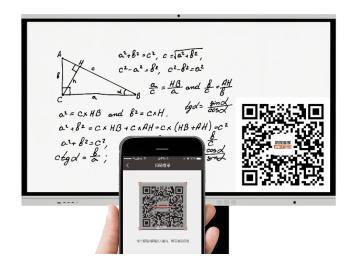

Scan Code to Share

Scan code to easily store and share meeting records

Main Features






Wireless Screen Cast

Transmit the content wirelessly, realizing real-time demonstration





Precise Written

1mm recognition accuracy make zooming, mobile dragging, roaming and other shortcut operation easy

Wide Viewing Angle

The wide 178°/178° viewing angle can ensure clear images from all angles


Specification

| ~ P • • • • • • • • • • • • • • • • • • • | MODEL | UL-IB6508 |
|--|------------------|---|
| Panel | Panel size | 65" |
| | Display area | 1428 x 803mm |
| | Resolution | 3840 x 2160 |
| | Aspect ratio | 16:9 |
| | Panel Type | D-LED technology, Brightness 450cd/m ² |
| | Contrast ratio | 4000:1 |
| | Viewing angle | 178°/178° |
| | Display color | 16.7 Billion (8bit) |
| | NFC | NFC screen cast optional |
| | Touch type | Infrared Multi points touch |
| | Touch precision | ≤1mm |
| | Tempered glass | 4mm, Morse level 7 |
| | Built in | 48/13MP camera and 8 array microphone |
| Android | Operating system | Android 14.0 |
| | CPU | 8-core Cortex A55 |
| | GPU | 64 bit (dual core GPU) Arm Mali-G52 MP2 950Mhz |
| | RAM | 8GB DDR4 |
| | Storage | 128GB EMMC5.1 |
| OPS Computer (Optional) | Operating system | Windows 7 / Windows 10 |
| | CPU | I5 / I7-11390H 3.4 GHZ |
| | Memory | RAM 8GB |
| | Storage | 256 GB SSD |
| Interfaces | Input | RJ45 IN x1, RS232 x1, AV IN x1, PC AUDIO x1, TOUCH USB x1 , HDMI x3 USB Type C *1, USB x3, TF(Max.128g) x1 |
| | Output | Earphone x1, Coax x1 |
| | Warranty | 3 Years on touch panel and 1 year on all other parts including OPS and lifetime technical support |

Specification

| | MODEL | UL-IB6508 |
|-----------------------|-------------------|--|
| Machine Parameters | Power supply | AC 100V~240V,50/60HZ |
| | Power consumption | 130W (Max) |
| | Speaker | Stereo 2*10W |
| | Material | Aluminum alloy front frame, metal back cover |
| | Color | Black or silver |
| | VESA | 400 x 400mm |
| | Net weight | 41.5±1 KG |
| | Gross weight | 51.5±1 KG |
| | Product size | 1481 x 913 x 95mm |
| | Carton size | 1630 x 240 x 1050mm |
| | Installation | Wall mount |
| | Accessories | Remote control x1 AC power cable (1.5M) x1 Wi-Fi antenna x1, Touch writing pen |
| | Wireless | Bluetooth 2.4G, Wifi 2.4/5Ghz 802.11a/b/g/n/ac |









Floor Standing Bracket





Intelligent Remarks

Record the inspiration in meetings at any time through the electronic whiteboard

Remote Video Conference

With powerful remote video conferencing function to achieve a decisive victory thousands of miles away





Interactive Teaching

Combined with sounds, images, videos, annotation drawing and so on to create an infectious teaching atmosphere

Schematic Drawing



